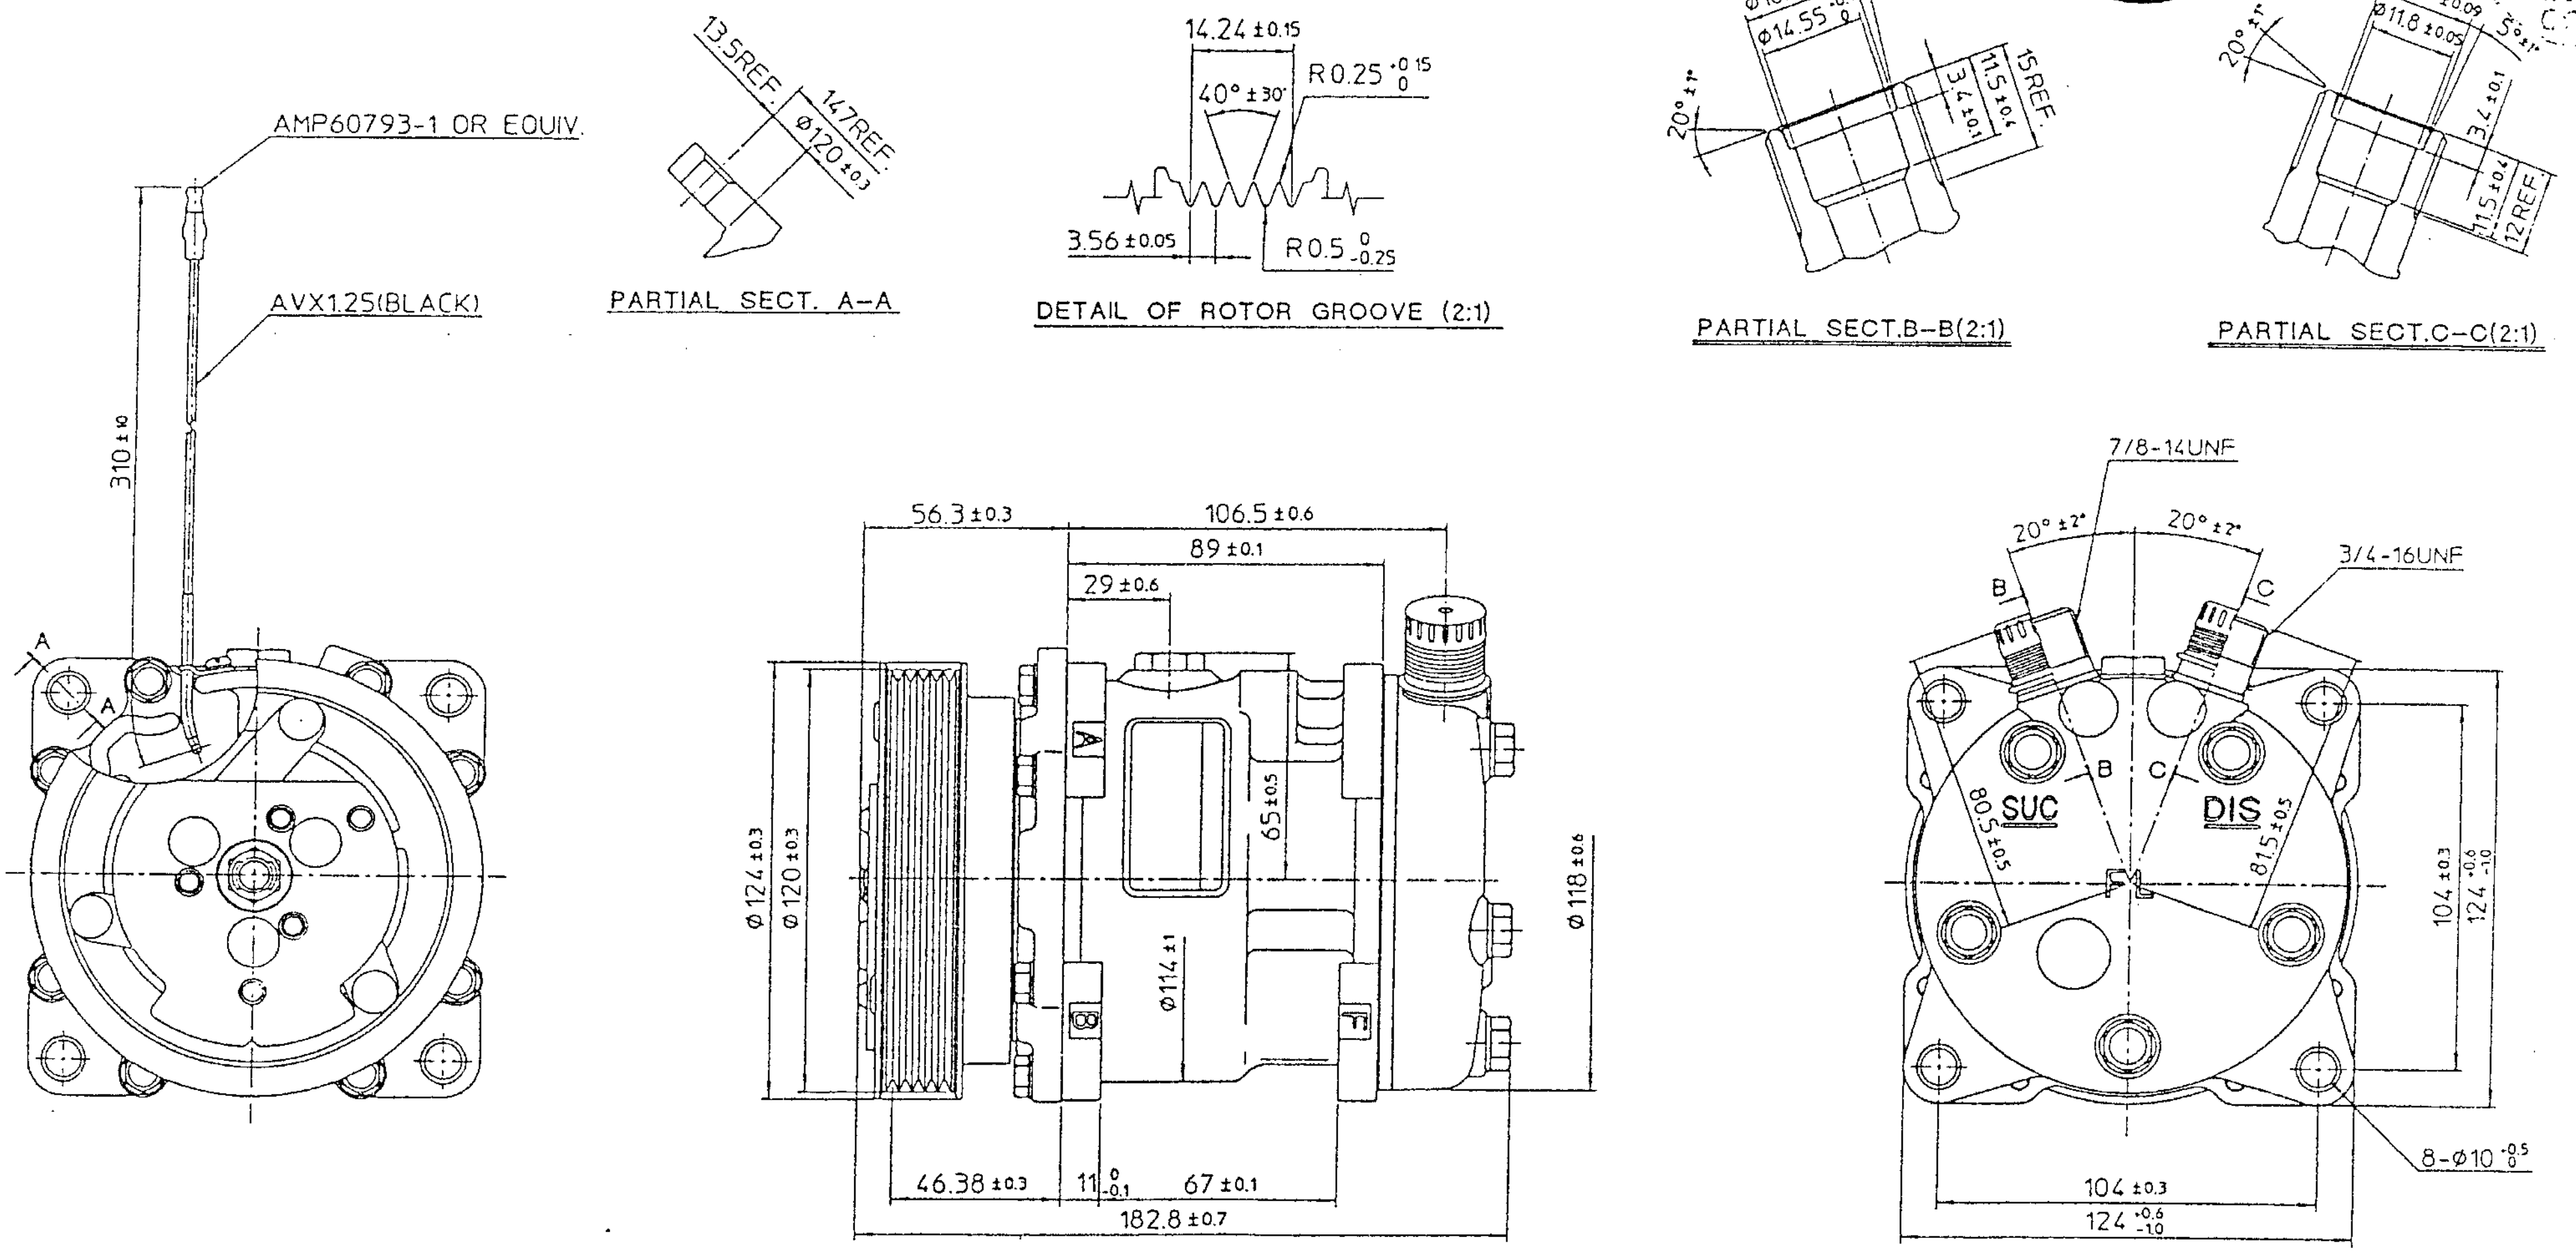

RECEIVED
05 SEP 1995
SIS
DRAWING CONTROL

UNCONTROLLED
'95. AUG. 25
SANDEN

COMPRESSOR SPECIFICATIONS

BORE	ø35 mm (1.38 in)
STROKE	18.07 mm (0.71 in)
DISPLACEMENT PER REVOLUTION	87 cc/rev.(5.3 cu.in/rev.)
NUMBER OF CYLINDERS	5
MAXIMUM ALLOWABLE r.p.m.	7500 r.p.m.
MAXIMUM ALLOWABLE CONTINUOUS r.p.m.	6500 r.p.m.
REFRIGERANT	R-134a
OIL : SP-20 OR EQUIV.	100 cc (3.4 fl.oz.)
WEIGHT	kg (lb)

CLUTCH SPECIFICATIONS

RATED VOLTAGE	DC 12 V
POWER CONSUMPTION	48 W (AL)
MAXIMUM ALLOWABLE r.p.m.	7500 r.p.m.
MAXIMUM ALLOWABLE CONTINUOUS r.p.m.	6500 r.p.m.
BELT TYPE	PV TYPE
PULLEY DIAMETER	ø120 mm (4.7 in)
WEIGHT	kg (lb)

MODEL SD5H09FL5074
NAME COMPRESSOR